
# FFWLCLC42

**Base Product** 



# Singlemode LC/UPC to LC/UPC, Fiber Patch Cord, 1.6 mm Duplex, Low Smoke Zero Halogen (LSZH)

• \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

### Product Classification

Regional Availability	Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America	
Portfolio	CommScope®	
Product Type	Fiber patch cord, duplex	
Product Brand	SYSTIMAX InstaPATCH® 360	
Product Series	FFW	
Government Funding	Build America Buy America (BABA) compliant*	
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration	
General Specifications		
Color, boot A	Blue	
Color, connector A	Blue	
Color, boot B	Blue	
Color, connector B	Blue	
Interface, Connector A	LC/UPC	
Interface, Connector B	LC/UPC	
Jacket Color	Yellow	
Polarity	Pairs, flipped	
Total Fibers, quantity	2	
Transmission Standards	TIA/EIA-568-C.3	
Dimensions		

Cable Assembly Length Range (m)

Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: July 29, 2024


1 - 999



# FFWLCLC42

Cable Assembly Length Range (ft)	1 – 999
Diameter Over Jacket	1.6 mm   0.063 in

# Ordering Tree

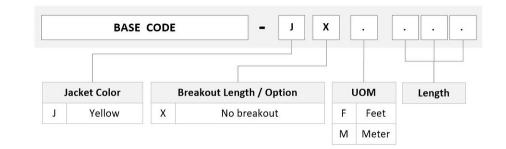

## Mechanical Specifications

1.24 lb @ 0 °	4.40 lb @ 90 °
	1.24 lb @ 0 °

# Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.652.D   G.657.A1, TeraSPEED®

## **Environmental Specifications**

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Dual Rated LSZH/Riser

#### Packaging and Weights

Packaging quantity

1

### Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: July 29, 2024

**COMMSCOPE**°

# FFWLCLC42



### Included Products

760021675 N-002-ZC-8W-F16YL/E	-	Fiber Indoor Cable, TeraSPEED® 1.6mm Low Smoke Zero Halogen Riser, 2-fiber Zipcord, Singlemode G.652.D and G.657.A1, Feet jacket marking, Yellow jacket color, Eca Flame Rating
860655488	-	LC/UPC Connector, Singlemode, Blue

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: July 29, 2024

